

Olympic[®] Instruments

For Dispensing Wire and Cordage

IF YOU HAVEN'T ALREADY...Consider this: Giving customers more than they want will hurt your profits. Giving them less will hurt your reputation. You need accuracy. You'll get it with Olympic.

WE MANUFACTURE OUR MEASURERS TO U.S./CANADIAN NATIONAL BUREAU OF STANDARDS SPECIFICATIONS


Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com

Measuring

Olympic Length Measurers possess low friction, positive control guiding components which assure the straight-line contact with the measuring wheel so important to measurer accuracy. Digital Counters rated at 1,000'/min. (300 M/min.) are housed in sturdy, dust-tight cases. Convenient release handles for quick and easy loading. Gray enamel finish.

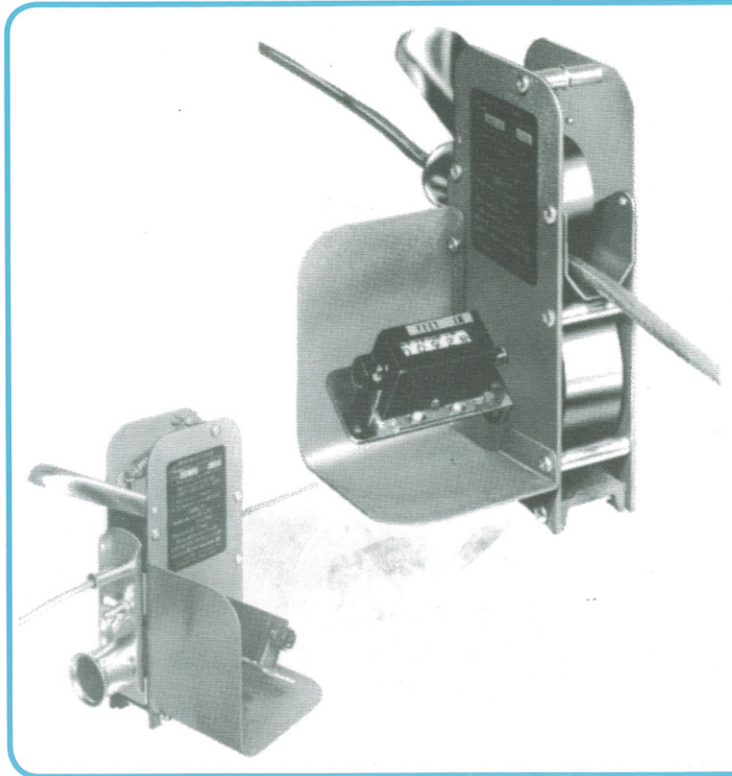

Wire Measurer 1410; Feet 1420; Metres

Conforms to Weights & Measures specifications in U.S.A. and Canada.


Wire Measurer accommodates a wide variety of flexible materials from 1/64" to 7/8" (.4 to 24 mm) diameter. Measures wire rope and similar stiff materials to 1/2" (13 mm) diameter.

Quickly interchangeable Guide Tubes with I.D.'s of 1/4" (6.3 mm) and 1" (25 mm) afford accurate guiding of many hard-to-measure materials. Stainless and heat-treated steel used for all shafts and surfaces subject to wear by material's passage. Digital Counter adds or subtracts. Resets to ZERO with one turn of knob. Model 1410 indicates to 9,999'-11"; No. 1420 to 999.9 Metres.

Optimum accuracy and convenience obtained when used with our Payout and Takeup Reels.

Height of Measurer is 8-5/16". Width, incl. Handle is 7-1/4".

Shpg. Wt. 1410 or 1420 5 lbs. (2.3 kg)
w/-8 Cutter 7 lbs. (3.2 kg)

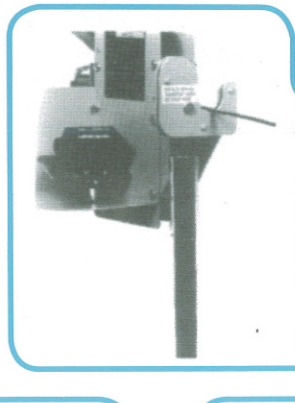

Cutter -8

Optional wire cutter mounts at exit edge of Measurer. Slicing action of Blade cuts cleanly. Easily resharpened. Not intended for steel wire, armored cable or very fine wire.


Shpg. Wt.2 lbs. (.9 kg)

Wire Measurer 1410-70

Swiveling roller guide replaces the stationary fairlead on Meter. This assures greater measuring accuracy if materials enter Meter from right angles; ie. wall-mounted or free-standing spool racks. (#1470 Guide may be purchased separately to add to existing Meter.)

Shpg. Wt.7 lbs. (3.2 kg)


Guide 40



19-1/2" high. Provides proper guidance of wire and rope into Measurers for optimum accuracy.

Wt.2 lbs. (.9 kg)

Stand 201



14" high. Mounts all Olympic 1400 series Measurers at correct height in relation to payout & takeup Reels (with #10 Reel, order #210 Meter Stand.)

Wt.2 lbs. (.9 kg)