Page 1 of 2 32-1062 REV 1020

The compact ES05 test stand is designed for compression testing of up to 30 lbF (150 N). Typical applications include switch contact activation testing, small spring testing, peel testing, and more. A spring-loaded lever allows for repeatable testing with up to 1.5" (38 mm) displacement. The lever mechanism can be repositioned along the length of the column, allowing this stand to be used for various sized samples.

The ES05's small footprint makes it particularly well suited to crowded workbenches, while its low weight makes it very portable for field auditing or for quick transportation to other testing areas.

Specifications

Load capacity:	30 lbF [150 N]
Loading method:	Spring-loaded lever
Maximum travel:	1.5 in [38 mm]
Warranty:	3 years (see individual statement for details)

Optional Equipment




Base plate AC1060

Contains 25 #10-32 threaded holes for fixture

In The Box

The ES05 test stand is shipped as shown at left, and includes the following accessories:

- (1) Allen wrench set

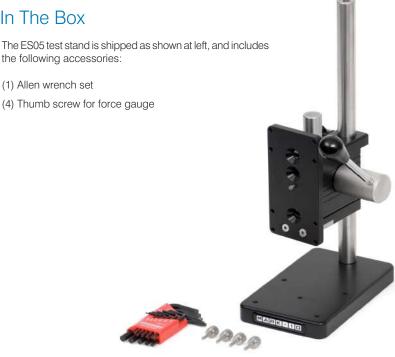



The ES05 is shown in a spring compresssion test, with Series 5 digital force gauge and 2" compression plate







Manual Force Test Stand **ES05**

32-1062 REV 1020 Page 2 of 2

Dimensions

in [mm]

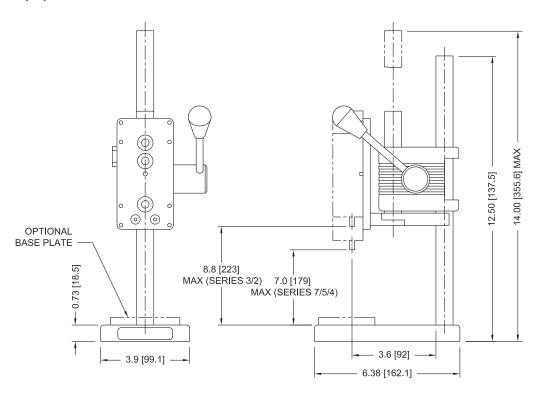



Ordering Information

Model No.	Description
ES05	Test stand, lever-operated, 30 lbF
AC1060	Base plate, threaded holes



