


LS-Series Vertical Float Level Switches

- Designed to be mounted on the top or bottom of a tank
- IP65 rated
- Includes float, stem, washer and nut

Pressure Limit: 290 psig (20 bar)
 Working Voltage: 250VAC, 200VDC
 Switching Current: 0.5A
 Fitting: 1/8" male M10
 Electrical Wire Length: 15.8" (400mm)

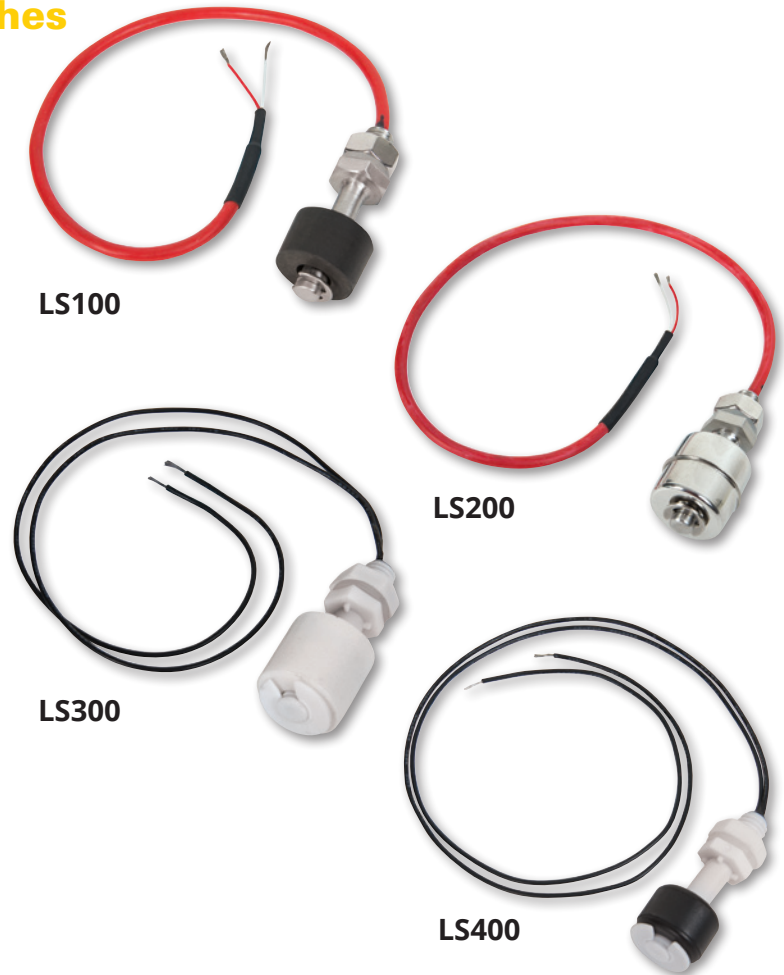

Model	LS100	LS200	LS300	LS400
Float/Stem Material	Buna-N & Epoxy / 316SS	316SS / 316SS	Polypropylene & Epoxy / Polypropylene	Buna-N & Epoxy / Polypropylene
Stem Length	2.44" (62mm)	2.52" (64mm)	2.17" (55mm)	2.17" (55mm)
Float Height	0.63" (16mm)	1.02" (26mm)	0.83" (21mm)	0.59" (15mm)
Float Diameter	0.98" (25mm)	0.98" (25mm)	0.91" (23mm)	0.87" (22mm)
Wire Jacket Material	Silicone	Silicone	PVC	PVC
Operating Temperature	-4 to 230°F (-20 to 110°C)	-4 to 230°F (-20 to 110°C)	-10 to 179°F (-10 to 85°C)	-10 to 179°F (-10 to 85°C)

Model	Description
LS100	Level Switch, Buna-N & Epoxy / 316SS, Silicone
LS200	Level Switch, 316SS Float and Stem, Silicone

Model	Description
LS300	Level Switch, Polypropylene & Epoxy / Polypropylene, PVC
LS400	Level Switch, Buna-N & Epoxy / Polypropylene, PVC



GlobalTestSupply.com/Baker



ITM.com/Baker