

Non-contact temperature measurement of plastic materials and glass surfaces from 0 °C to 710 °C (32 °F to 1310 °F)

Features:

- Accurate temperature measurement of thin plastic film materials like PET, PU, PTFE, PA and glass surfaces
- Double laser aiming marks real spot location and spot size up from 1.6 mm at any distance
- Optics 45:1 with selectable focus, compact sensor head size
- Usable up to 85 °C (185 °F) ambient temperature without cooling and automatic laser switch off at 50 °C (122 °F)
- Cooling and protection accessories for harsh environmental conditions



General specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature ¹⁾	-20 °C ... 85 °C (-4 °F ... 185 °F) (sensing head) (50 °C [122 °F] with laser ON) -20 °C ... 85 °C (-4 °F ... 185 °F) (electronics)
Storage temperature	-40 °C ... 125 °C (-4 °F ... 257 °F) (sensing head) -40 °C ... 85 °C (-40 °F ... 185 °F) (electronics)
Relative humidity	10 – 95 %, non condensing
Vibration	IEC 68-2-6: 3 G, 11 – 200 Hz, any axis
Shock	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	600 g (21.2 oz) (sensing head) 420 g (14.8 oz) (electronics)

Electrical specifications

Output / analog	0/4 – 20 mA, 0 – 5/ 10 V, thermocouple J, K
Output / alarm	24 V / 50 mA (open collector)
Optional	Relay: 2 x 60 V DC / 42 V AC _{eff} ; 0.4 A; optically isolated
Output / digital	USB, RS232, RS485, CAN, Profibus DP, Ethernet (optional)
Output impedances	mA max. 500 Ω (with 5 – 36 V DC) mV min. 100 kΩ load impedance, thermocouple 20 Ω
Inputs	Programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)
Cable length	3 m (standard), 8 m, 15 m (9.8 ft [standard], 26.2 ft, 49.2 ft)
Power supply	8 – 36 V DC
Current draw	max. 160 mA
Laser 635 nm	1 mW, ON/OFF via electronic box or software

Measurement specifications

Temperature range (scalable via programming keys or software)	0 °C ... 710 °C (32 °F ... 1310 °F)
Spectral range	7.9 μm
Optical resolution (90 % energy)	45:1
System accuracy ²⁾ (at ambient temp. 23 ± 5 °C) (at ambient tem. 73 ± 9 °F)	± 1 % or ± 1.5 °C ³⁾ (± 1 % or ± 2.7 °F ³⁾)
Repeatability (at ambient temp. 23 ± 5 °C) (at ambient tem. 73 ± 9 °F)	± 0.5 % or + 0.5 °C ³⁾ (± 0.5 % or + 0.9 °F ³⁾)
Temperature resolution (digital)	0.5 K
Exposure time ⁴⁾ (90 % signal)	150 ms
Emissivity/ Gain (adjustable via programming keys or software)	0.100 – 1.100
IR window correction (adjustable via programming keys or software)	0.100 – 1.000
Signal processing (parameter adjustable via software)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Software	optris® Compact Connect

¹⁾ The functioning of the LCD display may be limited in ambient temperatures below 0 °C

²⁾ ε = 1, response time 1 s


³⁾ Whichever is greater

⁴⁾ With dynamic adaptation at low signal levels

optris® CTlaser P7

Optical parameter

Chart SF optics, D:S = 45:1

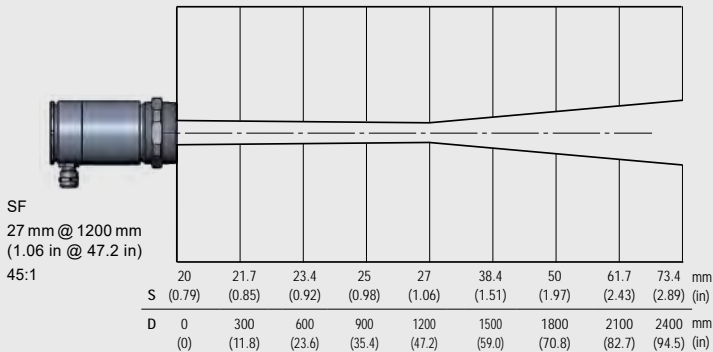


Further optics, D:S = 45:1


... SF	27 mm @ 1250 mm (1.06 in @ 49.2 in)
... CF1	1.6 mm @ 70 mm (0.06 in @ 2.76 in)
... CF2	3.4 mm @ 150 mm (0.13 in @ 5.91 in)
... CF3	4.5 mm @ 200 mm (0.18 in @ 7.87 in)
... CF4	10 mm @ 450 mm (0.39 in @ 17.7 in)

Dimensions

Sensing head

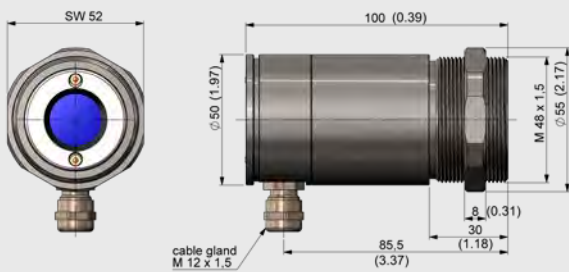

Electronics

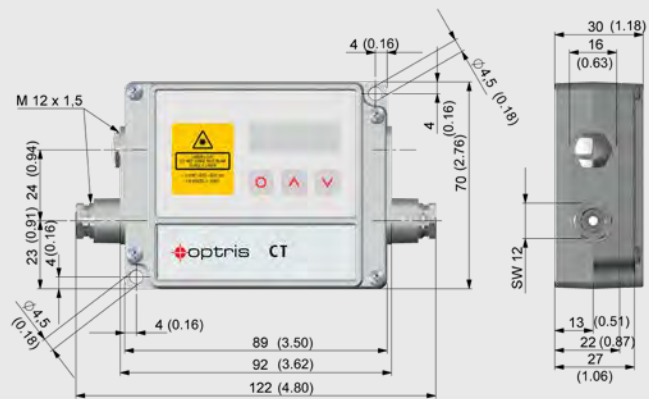

Accessories

Mounting angle, adjustable
in two axes (ACCTLAB)



Cooling housing
(ACCJCTL)



Mounting angle for cooling housing,
adjustable in two axes (ACCJAB)



Water cooling and air purge for
sensing head (ACCTLW + ACCTLAP)



Mounting device for cooling housing
(ACCTLRM)

