
Digital pH Meter

DPHE

Cat.No.4320

- Automatic Temperature Compensation!
- Waterproof design!
- Compact & portable design!
 - Sturdy body design for electrode-protection
 - Electrode can be cleaned with tap water (Use of deionized water will damage the electrode.)



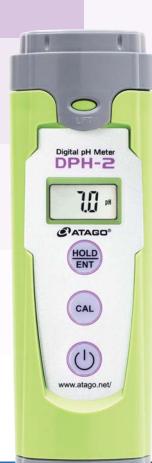







- Food and beverage production control
- Brewing, fermentation, and food process control
- Soil-based agriculture and hydroponics
- Cutting oils, alkaline washing liquids
- pH levels of fruit juices
- Quality control for aquacultures and aquariums
- pH levels of boiler liquids
- pH levels of alkaline liquid
- Other soluble solutions

Specifications

Measurement range: 0.0 to 14.0pH

Resolution: 0.1pH

Measurement accuracy: ±0.1pH (2.0 to 12.0pH)
Temperature compensation range: 0 to 50°C

(Automatic Temperature Compensation)

Calibration: 3-points (4.0, 7.0, and 10.0)

Power supply: watch battery (LR44)1.4V×4

Materials in contact wth the solution : Main body-ABS resin/Electrode-PBT resin

International Protection class: IP67

Dimensions & weight: 4.5×3.0×16.3cm, 90g

All ATAGO products are designed and manufactured in Japan.



ATAGO products comply with HACCP, GMP, and GLP system standards.





* Specifications and appearance are subject to change without notice.

www.GlobalTestSupply.com

sales@GlobalTestSupply.com