


# Gasman

## Portable Gas Detection Equipment



- ▮ Robust
- ▮ Effective warning
- ▮ Flexible
- ▮ User friendly

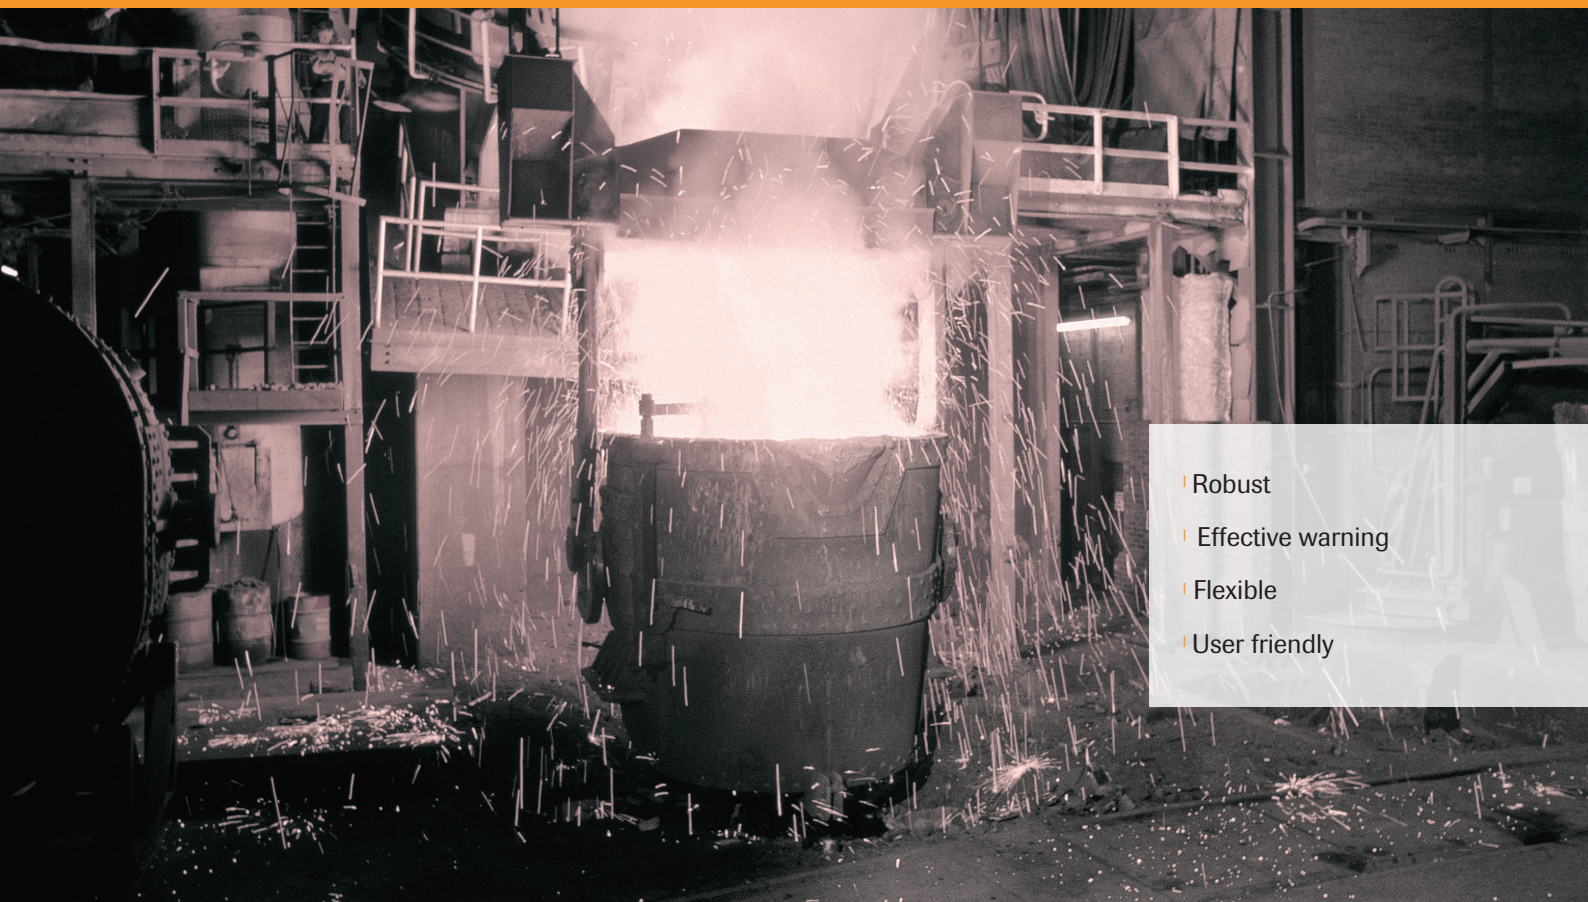

# Gasman

## Personal Single Gas Monitor

**When lives and property are at risk and you need gas detection equipment that is totally reliable, you need Crowcon. For over 40 years Crowcon has been developing and manufacturing high quality products with a reputation for reliability and technical innovation.**

**Crowcon provide both single gas and multigas monitors for personal safety and portable monitoring applications providing protection against a wide range of industrial gas hazards.**



### Choosing the portable gas detector for your needs

Gasman is a range of rugged, compact single gas personal monitors designed for use in the toughest environments.

With rugged impact resistant construction and compliance to IP65, Gasman offers a wide range of gases, including six flammable calibration options. Gasman gives an unbeatable combination of powerful loud and bright alarms. It's stunningly compact and lightweight design makes it ideal for use in industries such as oil and gas, chemical, steel works and waste and water works.

Gasman is small, light and easy to use. Weighing just 130g, it is extremely durable, with high impact resistance and dust/water ingress protection to IP65. When potentially hazardous levels of gas are detected, the Gasman alerts the user with a loud 95 dB alarm, a vivid red/blue visual warning and also by vibrating.

Gasman features simple, single-button control and has an easy-to-read, backlit LCD display to ensure clear viewing of gas level readings, alarm conditions and battery life. Data and event logging are available as standard, and there is a built-in 30 day advance warning when calibration is due.



#### Robust

Tough polycarbonate housing	Protects you in the harshest environments
Water and dust resistant to IP65	
Full overmoulding	High impact resistance

#### Effective warning

2 levels of instantaneous alarm and TWA alarms for toxic versions	Ensures prompt evacuation from hazardous zone
95dB audible alarm	
Vivid twin red/blue visual alarm	If ambient noise is high, Gasman still alerts you by vibrating and with the high

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

## Flexible

Versions available for flammable gas, oxygen and toxic gases	Gas detector tailored to your requirements
Rechargeable versions for all gas types	
Non-rechargeable versions for oxygen and toxic gases	
Real time TWA and peak display options	
Fully interchangeable intelligent sensor modules	

## User friendly

One button operation	Quick and easy to use
Backlit display for gas diagnostics and operating status	Easy to read
Ultra lightweight- just 85g for toxic versions	Comfortable to wear



## Gas Test Kit

The Gas Test Kit provides a simple and convenient means of carrying out either bump test or a field calibration.

## Gases and Ranges

Required ranges and alarms vary by country and application and these can be configured as required. Each gas channel can have two instantaneous alarm levels set. Toxic units also have Time Weighted Average (TWA) alarms.

Flammable gas calibration is available for methane, propane, pentane, hydrogen and ethylene as standard. Contact Crowcon for other target flammable gases and information on unfiltered sensors for alcohols, ketones, and general solvents.

Gasman is also available in a safe area CO<sub>2</sub> version offering 0-5% carbon dioxide measurements.

### Typical ranges and alarms:

Gas	Range	Standard Alarm (UK)
Ammonia (NH <sub>3</sub> )	0-1000ppm	25ppm
Carbon monoxide (CO)	0-1500ppm	30ppm
Carbon dioxide (CO <sub>2</sub> )	0.5%	0.5%
Carbon monoxide (H <sub>2</sub> filtered)	0-500ppm	30ppm
Chlorine (Cl <sub>2</sub> )	0-20ppm	0.3ppm
Chlorine Dioxide (ClO <sub>2</sub> )	0-1ppm	0.1ppm
Ethylene Oxide (ETO)	0-10ppm	3ppm
Flammable	0-100% LEL	20% LEL
Fluorine (F <sub>2</sub> )	0-1ppm	0.5ppm

Gas	Range	Standard Alarm (UK)
Hydrogen fluoride (HF)	0-10 ppm	1ppm
Hydrogen sulphide (H <sub>2</sub> S)	0-250 ppm	5ppm
Nitric oxide (NO)	0-100 ppm	25ppm
Nitrogen dioxide (NO <sub>2</sub> )	0-20 ppm	1ppm
Oxygen (O <sub>2</sub> )	0-25%	19/23%
Ozone (O <sub>3</sub> )	0-1 ppm	0.1ppm
Phosphine (PH <sub>3</sub> )	0-5 ppm	0.1ppm
Phosgene (COCl <sub>2</sub> )	0-1 ppm	0.1ppm
Sulphur dioxide (SO <sub>2</sub> )	0-20 ppm	1ppm

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

Please see the back page for full technical specifications.

## Gasman Specification:

<b>Size</b>		90 x 48 x 24 mm (3.5 x 1.9 x 0.95 ins)
<b>Weight</b>	Flammable Toxic Oxygen Carbon dioxide	138g (4.9oz) 85g (3oz) 129g (4.6oz) 139g (4.9oz)
<b>Typical response times (T<sub>90</sub>)</b>	Flammable Toxic gas Oxygen	20s 20s 10s
<b>Alarms</b>	Audible Visible Vibrating	95dB Multiple alarm options let you select distinctive tones for different alarm levels Dual colours red/ blue flashing LEDs in a gas hazard Internal vibrating alarm
<b>Display</b>		Custom LCD with backlight and display of gas concentration. Graphic symbols for battery (with proportional indication of remaining operation time), and display mode. Start up indication when calibration is due within 30 days, calibration overdue or service required.
<b>Display modes</b>	Normal display Display recall	Real time gas concentration levels Peak readings and TWA
<b>Datalogging</b>		Full timed data logging with adjustable sample rate, set to 1 min. data rate as default. 900 hours storage at 1 min. interval (54,000 logs), >4800 events
<b>Battery</b>	Rechargeable Non rechargeable	Lithium battery for all gas types Lithium battery for toxics and oxygen (excluding CO <sub>2</sub> )
<b>Operating time*</b>	Rechargeable Non rechargeable	12 hours minimum for flammable unit Up to 2 years
<b>Sampling</b>		Optional manual aspirator
<b>Operating temperature range**</b>		-20°C to + 65°C (-4°F to +149°F)
<b>Humidity</b>		5-95% RH***
<b>Ingress protection</b>		IP65
<b>Approval codes</b>	Europe International North America	Toxic or O <sub>2</sub> : ATEX II 1G Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +65°C) BASEEFA04ATEX0384 Flammable: ATEX II 2G Ex ia d IIC T4 Gb (-20°C ≤ Ta ≤ +65°C) BASEEFA04ATEX0383 Toxic or O <sub>2</sub> : IECEx BAS05.0039 Flammable: IECEx BAS05.0038 CSA Class 1 Groups A,B,C,D Division 1
<b>Standards safety</b>	Europe North America	EN60079-0, EN60079-11, EN60079-1, 2014/34/EU CSA22.2, 152
<b>Operation standards</b>		EN50270, EN50271, IEC61508, EN61779, EN45544
<b>PC interface</b>		RS232 connection from 'Charger/interface' variation RS232/USB converter available
<b>Calibration</b>		Gasman can be routinely calibrated using Portables Pro software
<b>Accessories</b>		Gasman is supplied with an integral alligator clip. Optional accessories: gas test kit, Gasman external filter, leather carry case, single way charger, charger interface software and communication kit (excluding PSU), 5 way multi-charger

\*Operating time will depend on operating pattern and alarm occurrence. Frequent or long lasting alarms and use of the optional confidence beep will reduce battery life.

\*\*Toxic and oxygen sensors are not rated for continuous operation at high temperatures. Consult Crowcon if operating temperatures are likely to exceed 40°C (104°F) for extended periods.

\*\*\* Sensor humidity range varies by sensor type, consult Crowcon for further details

Crowcon reserves the right to change the design or specification of the product without notice.  
Check [www.crowcon.com](http://www.crowcon.com) for updates.

[www.crowcon.com](http://www.crowcon.com)

### UK:

Tel: +44 (0) 1235 557700  
Fax: +44 (0) 1235 557718  
Email: [sales@crowcon.com](mailto:sales@crowcon.com)

### US:

Tel: +1 859 957 1039  
Toll Free: 800 527 6926  
Fax: +1 513 957 1044  
Email: [salesusa@crowcon.com](mailto:salesusa@crowcon.com)

### NL:

Tel: +31 20 2700 2100

### SG:

Tel: +65 6745 2936  
Fax: +65 6745 0467  
Email: [sales@crowcon.com.sg](mailto:sales@crowcon.com.sg)

### CN:

Tel: +86 (0) 10 6787 0335  
Fax: +86 (0) 10 6787 4879  
Email: [saleschina@crowcon.com](mailto:saleschina@crowcon.com)

### IN:

Tel: +91 22 6708 0400  
Fax: +91 22 6708 0400



Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)